




WHERE YOU NEED THE LIGHT,
YOU NEED THELUX.

2021-2022

LED GENERAL CATALOG

LED PIONEER

 Made in THELUX

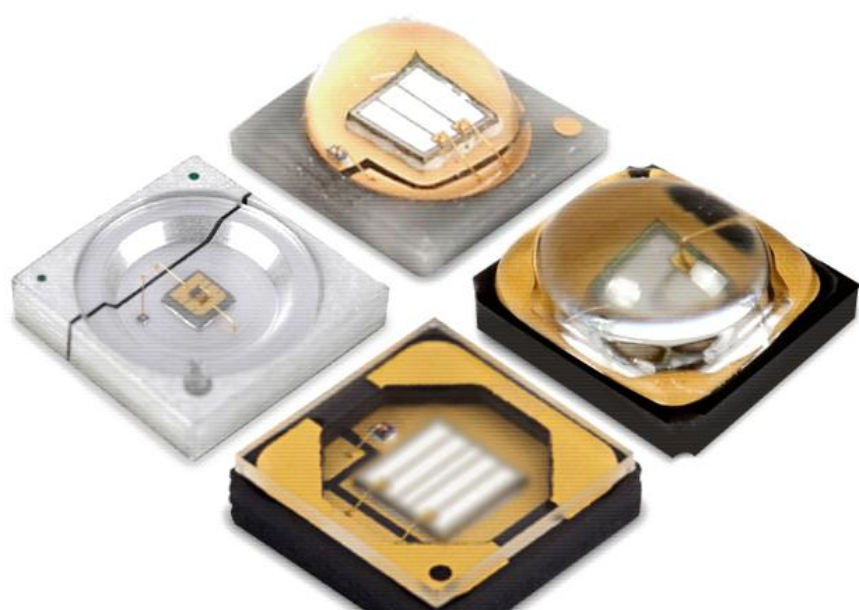

ABOUT **Thelux**



Foshan Thelux LED Lighting Co., Ltd. Is one of the newest developing high-tech LED lighting products manufacturing enterprise.

Always with innovation of technology and original intention of best service, Thelux is showing our vitality and execute, aims at building up a efficient and high quality lighting enterprise. We have won a high reputation in the world for the innovation, quality, excellent service and products. What's more, Thelux has become one of the main supplier of high tech LED products in the world.



LED PIONEER




Made in THELUX

Thelux, has 13000 square meters of R & D, production base and 450 employees. Our main products include: LED street lamp, LED flood light, led track light, led down light, LED panel light, etc., which can fully meet the requirements of indoor lighting, commercial lighting, project lighting, road lighting and other applications. All of products have passed CE certification, ROHS certification, and some products have passed Inmetro certification, SAA certification, GS certification and TUV certification. We already won very good reputation in varies countries and regions.

Thelux, has one of the best R&D teams with experienced engineering and application resources. We already established a customers oriented brand spirit at the base of tech innovation, lighting solution, comprehensive service system and spirit. Today, Thelux is offering products, designs and developing service to more than 300 customers and engineering partners all over the world.


Leading technology, customer first, integrity&pragmatic, top service, always is the intention of Thelux. Our products focus on technical content, quality and users. We are providing a full range of services from designing, production and after-sales. Thelux is willing to sincerely cooperate with all the customers in the world. Let's mTSLe the night more bright and dress up the global village!

WELCOME

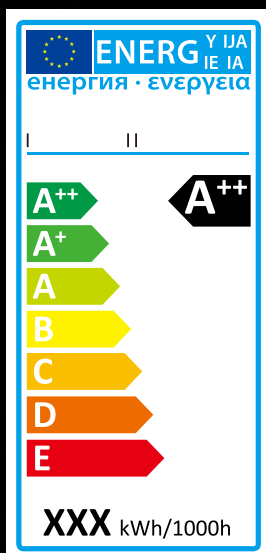

LED PIONEER
Made in THELUX

HOW TO USE THIS CATALOG

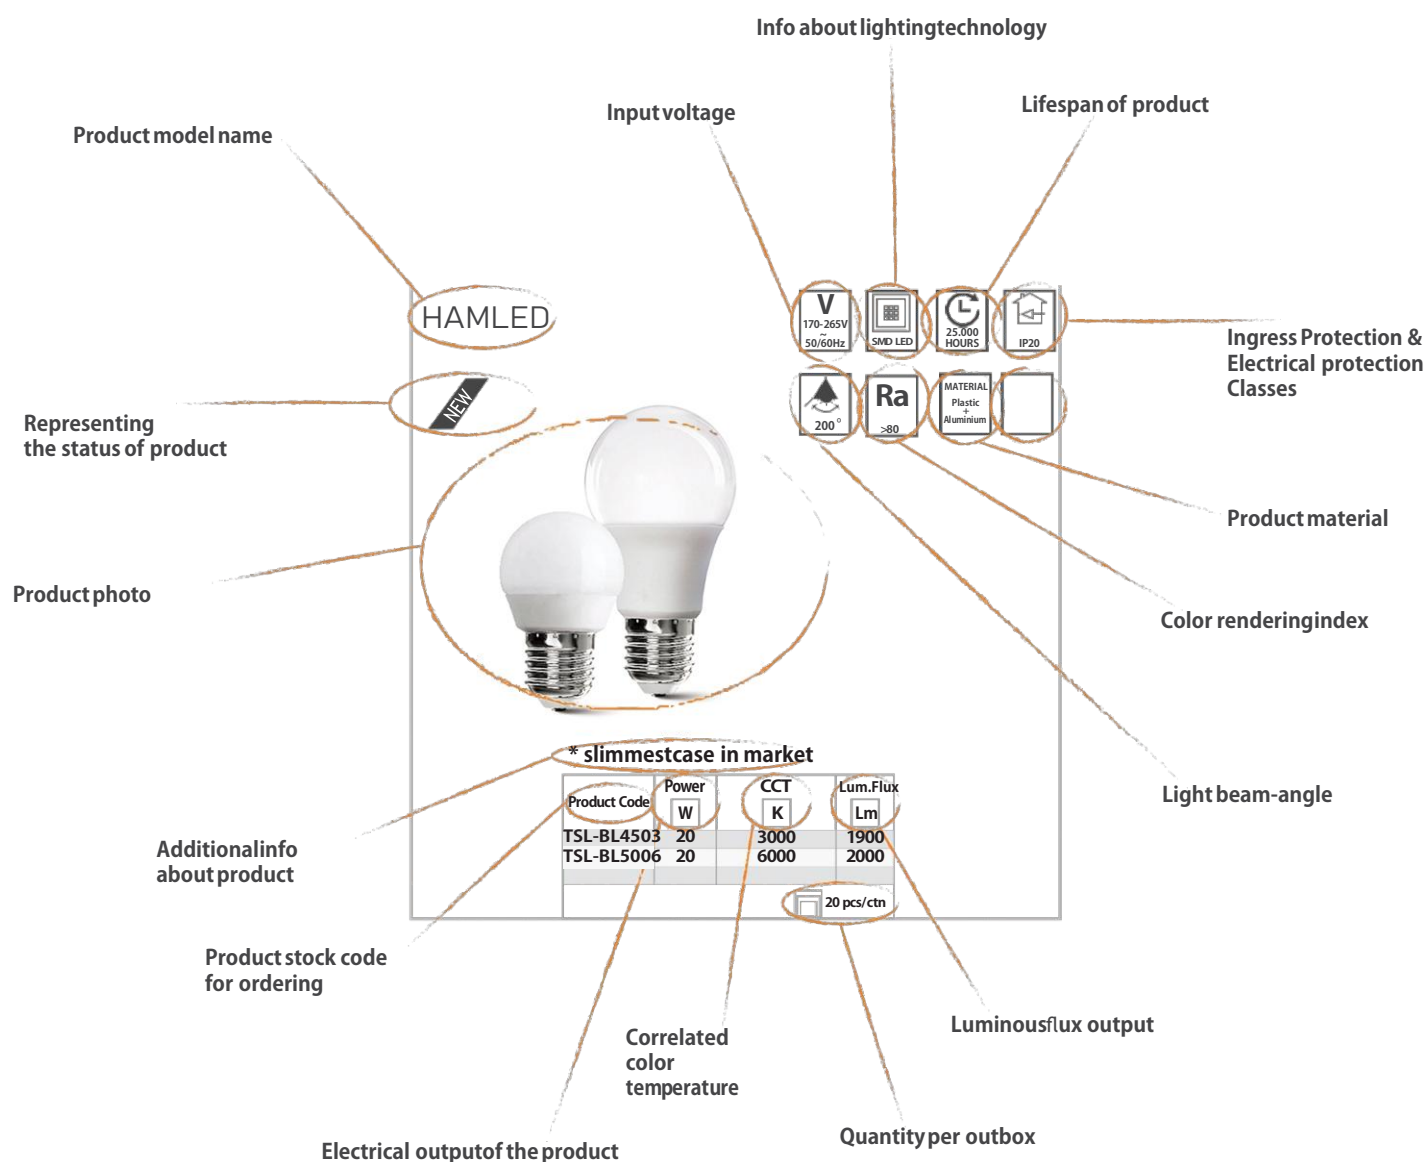

HOW TO USE THIS CATALOG



This mark indicates that a bulb should not be operated in a confined space.



This mark indicates that a bulb should not be operated within an area less than 6 inches.



This mark indicates that a bulb should not be operated in a wet area.



This mark indicates that a person should not look directly to a light source.



When removing and installing the bulb, ensure that the switch is in the off position.



Fluorescent tubes, compact fluorescent, germicidal, blacklight, metal halide and other HID light bulbs all contain mercury compounds. Incandescent, halogen and LED bulbs do not contain mercury.



The IR Free mark means it has no infrared wavelength.



According to the National Institutes for Health, compact fluorescent lamps have the potential for emitting ultraviolet light, a high-energy, invisible form of light that can cause sunburn, skin cancers and other problems. UV Free mark means a light source emits acceptable levels of UV.



Instant 100% mark means a light source operating with 100% efficiency when it is energized.



CE marking is a certification mark that indicates conformity with health, safety, and environmental protection standards for products sold within the European Economic Area. The CE marking is also found on products sold outside the EEA that have been manufactured to EEA standards.



The Eurasian Conformity mark (EAC, Russian: Единый стандарт ЕАЭС (EAC)) is a certification mark to indicate products that conform to all technical regulations of the Eurasian Customs Union.



GOST (Russian: ГОСТ) refers to a set of technical standards maintained by the Euro-Asian Council for Standardization, Metrology and Certification (EASC), a regional standards organization operating under the auspices of the Commonwealth of Independent States (CIS).




The UkrSEPRO certificate proves conformity of products with standards and technical rules which are demanded by the government of Ukraine.



National conformity label SM is formed of the letters S and M, respectively symbolize "safety as essential requirements" and "Moldova".



TSE has been providing SASO Quality Mark services as an authorized body by SASO and assist manufacturers during their exports to Saudi Arabia.

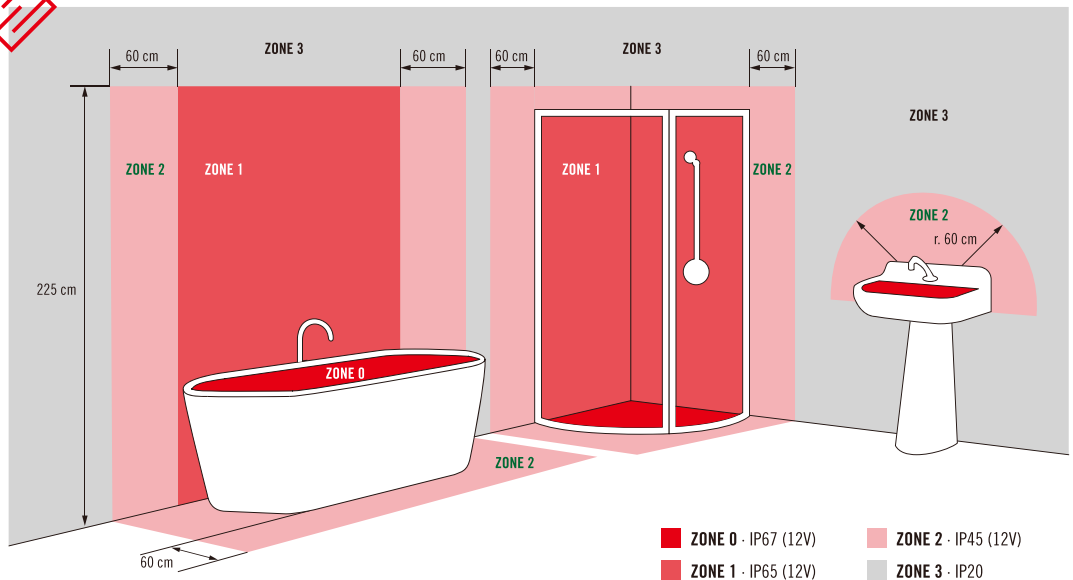

INGRESS PROTECTION (IP) TABLE

1st character : Protection level against solid objects		2nd character : Protection level against liquid ingress								
		Non protected	Water drops	15 water drops	Spraying water	Splashing water	Water jets	Powerful water jets	Temporary immersion	Continuous immersion
		0	1	2	3	4	5	6	7	8
Non protected	0	IP00	-	-	-	-	-	-	-	-
Solid objects Dia.>50mm	1	-	-	-	-	-	-	-	-	-
Solid objects Dia.>12.5mm	2	IP20	-	-	-	-	-	-	-	-
Solid objects Dia.>2.5mm	3	-	-	-	IP33	-	-	-	-	-
Solid objects Dia.>1mm	4	-	-	-	-	IP44	-	-	-	-
Dust protected	5	-	-	-	IP53	IP54	-	-	-	-
Dust tight	6	-	-	-	-	-	IP65	IP66	IP67	IP68


Zone 0 is inside the bath or shower itself. Any fitting used in this zone must be low voltage, (max 12v) and be rated at least IP67 which is total immersion proof.

Zone 1 is the area above the bath or shower to a height of 2.25m from the floor. In this zone a minimum rating of IP45 is required but it is generally accepted that IP65 is to be used.

Zone 2 is an area stretching 0.6m outside the perimeter of the bath and to a height of 2.25m from the floor. In this zone an IP rating of at least IP44 is required. In addition it is good practice to consider the area around a washbasin, within a 60cm radius of any tap to be considered as zone 2. There are lots of wall light options to cover your zone 2 areas. You will note that they have been installed quite high up, away from any splashing.

Outside Zones is anywhere outside zones 0, 1 and 2 (subject to specific limits) and where no water jet is likely to be used. There are no special


TECHNICAL INFORMATION AND REFERENCES

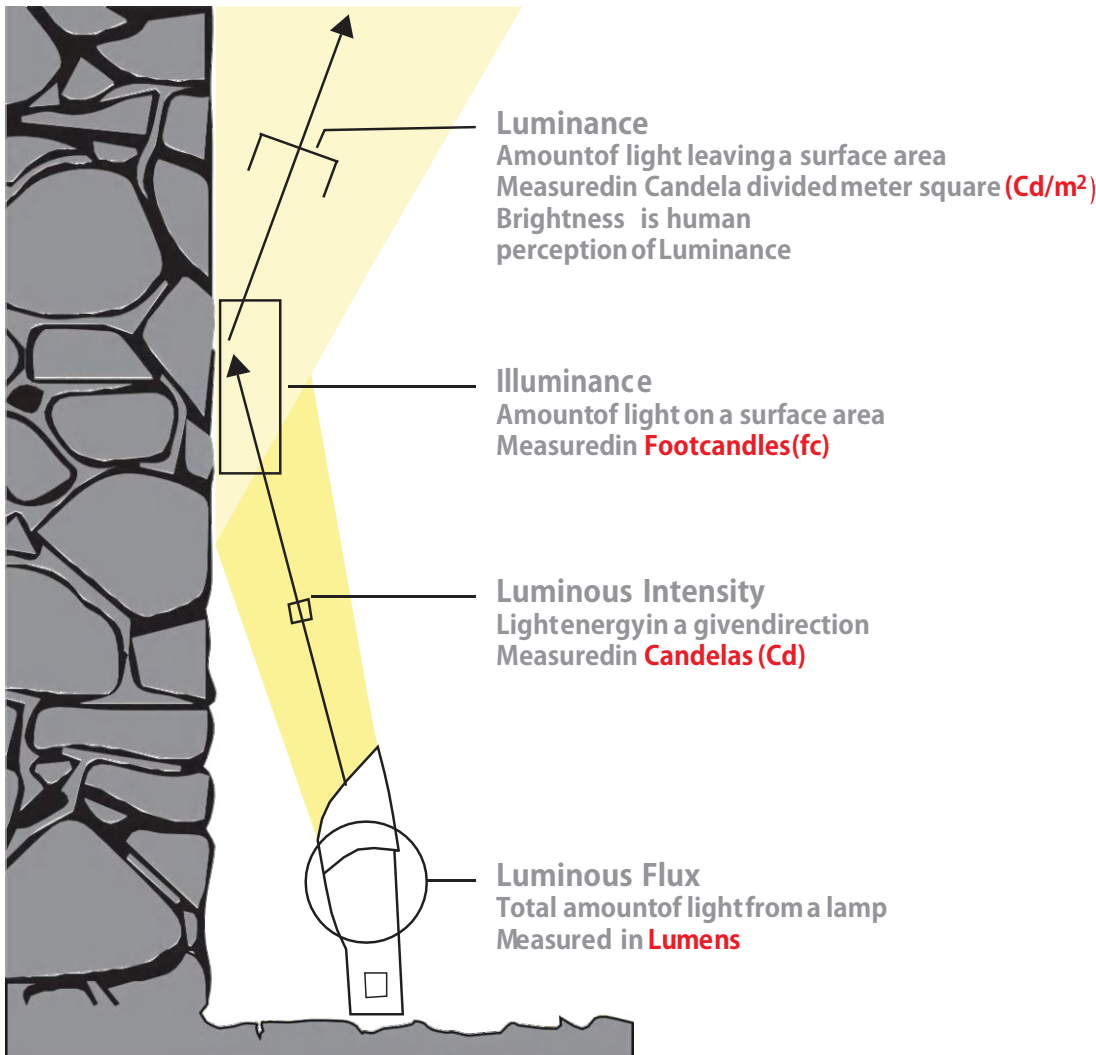


COLOR TEMPERATURE SCALE and APPLICATIONS

Color Temperature	2700 Kelvin	3000 Kelvin	3500 Kelvin	4100 Kelvin	5000 Kelvin	6500 Kelvin
Descriptive Color Reference	Warm White	Soft White	Medium White	Cool White	Soft Daylight	Daylight
Sources	Incandescent, High pressure Sodium (2200K), Fluorescent, LED	Halogen, Metal Halide (3000K), Fluorescent, LED	Fluorescent, LED	Metal Halide (4000K), Fluorescent, LED	Fluorescent, LED	Fluorescent, LED
Associated Effects and Mood	Friendly, Intimate, Personal, Exclusive	Peaceful, Calm, Warm, Soothing	Inviting, Non-threatening	Clean, Fresh, Neat, Efficient	Vibrant, Lively, Cheerful, High Spirits	Vivid, Alert, Vibrant, Dynamic
Appropriate Applications	Bedrooms Rest rooms Libraries	Restaurants Hotel lobbies Boutiques Libraries	Reception areas Showrooms Bookstores Offices	Retail stores Offices Factories	Offices Conference rooms Classrooms Hospitals Retail stores	Galleries Museums Jewelry stores Printing companies

TECHNICAL INFORMATION AND REFERENCES

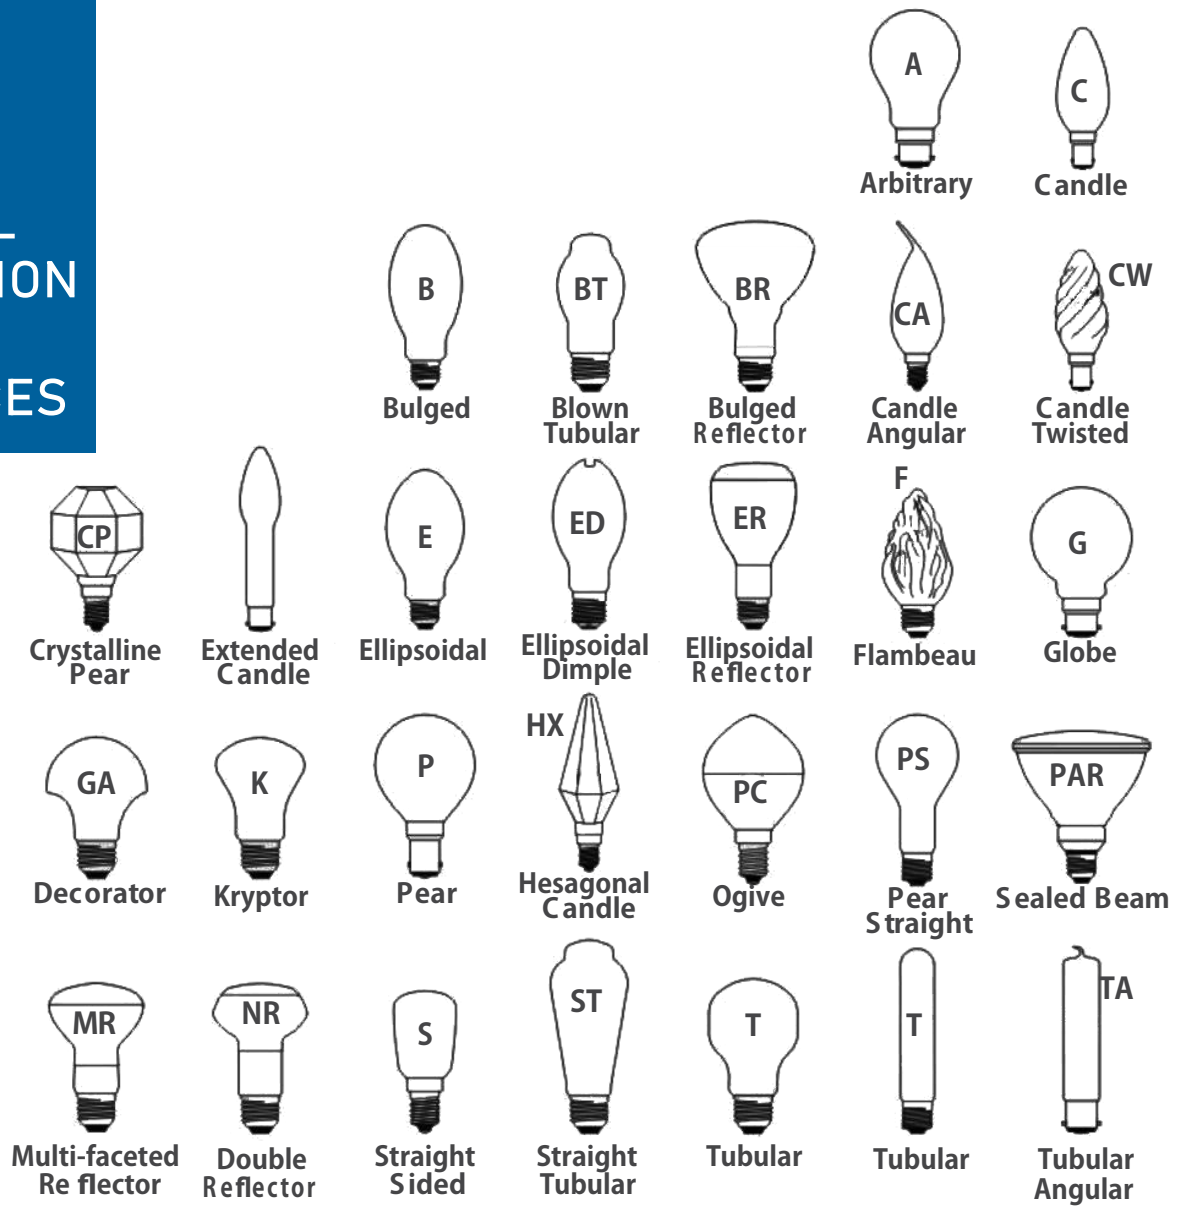

PAR SERIES

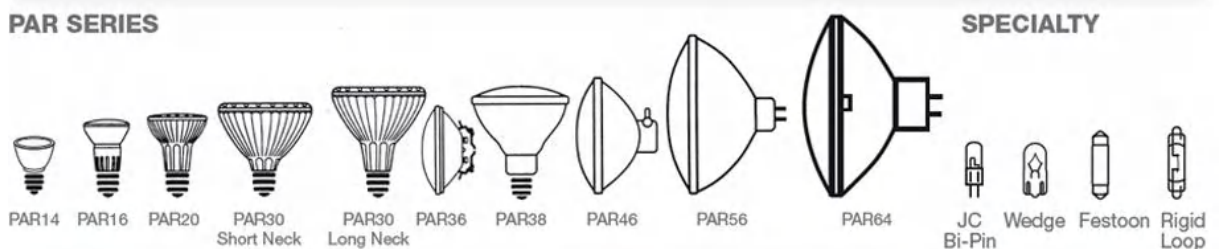


LINESTRA




T10

LINEAR FLUORESCENTS




T2 T4 T5 T8 T12

COMPACT FLUORESCENT COILS




T2 Coil T3 Coil T4 Coil

COMPACT FLUORESCENT PLUG IN LAMPS




Twin Tube Triple Tube Quad Tube


TECHNICAL INFORMATION AND REFERENCES

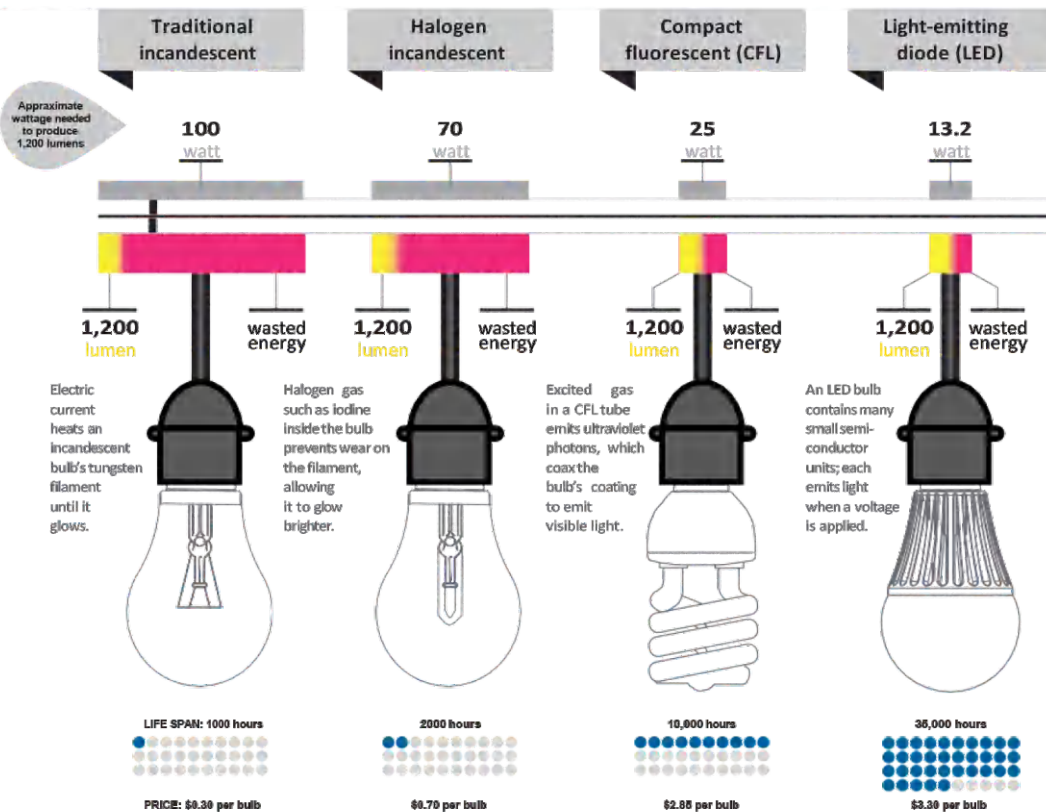

SCREW BASES

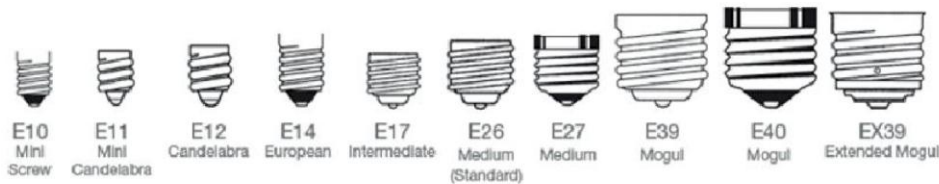

TWIST & LOCK BASES




SPECIALTY BASES




BI PIN BASES



FLUORESCENT PIN BASES

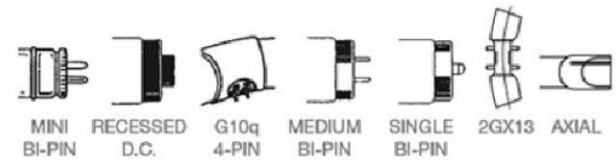


COMPACT FLUORESCENT PLUG IN LAMP BASES

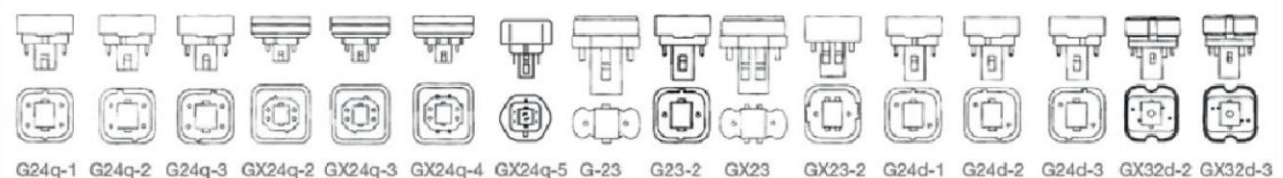

WE JUST OFFER THELUX






Thelux 
LED TECHNOLOGY

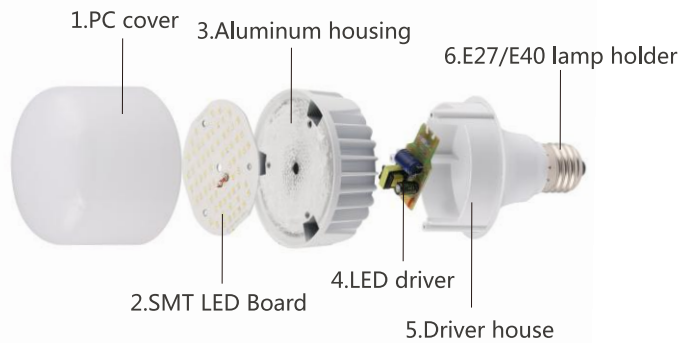

TORCH Aluminum

2 YEARS





Code	Power	Size	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox	Outbox Dimensions
TSL-BT8020	20W	D80x150	SMD2835 24pcs	2000lm	100lm/W	80	0.5	40/1	42x34x32cm
TSL-BT10030	30W	D100x180	SMD2835 36pcs	3000lm	100lm/W	80	0.5	40/1	53x43x42cm
TSL-BT12040	40W	D120x210	SMD2835 48pcs	4000lm	100lm/W	80	0.5	25/1	63x63x25cm
TSL-BT12050	50W	D120x210	SMD2835 63pcs	5000lm	100lm/W	80	0.5	25/1	63x63x25cm
TSL-BT12060	60W	D120x220	SMD2835 75pcs	6000lm	100lm/W	80	0.5	15/1	63x39x26cm
TSL-BT13575	75W	D135x258	SMD2835 96pcs	7500lm	100lm/W	80	0.5	8/1	57x29x30cm
TSL-BT150100	100W	D150x273	SMD2835 120pcs	10000lm	100lm/W	80	0.5	8/1	63x32x30cm





UFO Aluminum/glued driver

2 YEARS





Code	Power	Size	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox	Outbox Dimensions
TSL-BU13030	30W	D130x138	SMD2835 36pcs	3000lm	100lm/W	80	0.5	24/1	51x45x27cm
TSL-BU15050	50W	D150x160	SMD2835 63pcs	5000lm	100lm/W	80	0.5	24/1	59x51x31cm
TSL-BU17570	70W	D175x150	SMD2835 86pcs	7000lm	100lm/W	80	0.5	18/1	55x47x37cm
TSL-BU235100	100W	D235x152	SMD2835 121pcs	10000lm	100lm/W	80	0.5	12/1	49x47x48cm



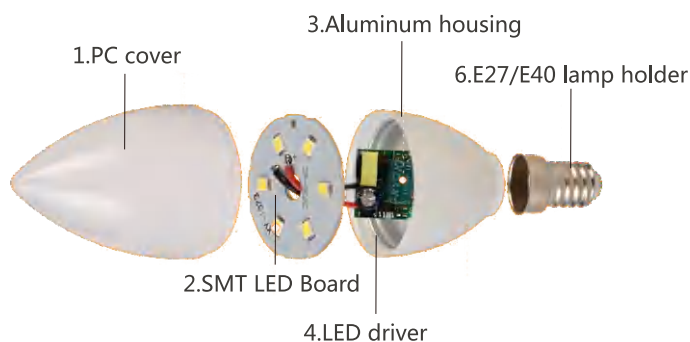


2 YEARS



Code	Power	Size	LEDs	Lum.Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox	Outbox Dimensions
TSL-BC3705	5W	C37	SMD2835 7pcs	525lm	100lm/W	80	0.5	100/1	39x20x28cm
TSL-BC3708	8W	C37	SMD2835 9pcs	840lm	100lm/W	80	0.5	100/1	39x20x28cm
TSL-BC3705A	5W	CA37	SMD2835 7pcs	525lm	100lm/W	80	0.5	100/1	39x20x22cm
TSL-BC3708A	8W	CA37	SMD2835 9pcs	840lm	100lm/W	80	0.5	100/1	39x20x22cm



2 YEARS



Code	Power	Size	LEDs	Lum.Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox	Outbox Dimensions
TSL-BC3707	7W	C37	SMD2835 42pcs	700lm	100lm/W	80	0.5	100/1	50x50x17cm
TSL-BC3710	10W	C37	SMD2835 56pcs	1000lm	100lm/W	80	0.5	100/1	50x50x17cm
TSL-BC3707A	7W	Ca37	SMD2835 42pcs	700lm	100lm/W	80	0.5	100/1	50x50x17cm
TSL-BC3710S	10W	Ca37	SMD2835 56pcs	1000lm	100lm/W	80	0.5	100/1	50x50x17cm



ENJOY
THELUX

Thelux
LED TECHNOLOGY





DOWN LIGHT
COB Aluminum

2 YEARS



Code	Power	Size	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox	Outbox Dimensions
TSL-D007/9	9W	D90	1pc	900lm	100lm/W	80	0.5	100/1	49.5x29.5x48cm
TSL-D007/12	12W	D120	1pc	1200lm	100lm/W	80	0.5	500/1	65x27x30cm
TSL-D007/18	18W	D170	1pc	1800lm	100lm/W	80	0.5	40/1	73x38x39cm
TSL-D007/36	36W	D220	1pc	3600lm	100lm/W	80	0.9	20/1	48x37x51cm




DOWN LIGHT
COB Aluminum

2 YEARS



Code	Power	Size	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox	Outbox Dimensions
TSL-D001/7	7W	95x45@75	1pc	700lm	100lm/W	80	0.5	100/1	53x29.5x44cm
TSL-D001/10	10W	110x45@100	1pc	1000lm	100lm/W	80	0.5	50/1	65x39.5x29cm
TSL-D001/15	15W	170x65@155	1pc	1500lm	100lm/W	80	0.5	30/1	36.5x29.5x38cm
TSL-D001/30	30W	225x60@200	1pc	3000lm	100lm/W	80	0.9	20/1	58x47x26cm





ADJUSTABLE COB Down Light

2 YEARS
V
 85 - 265V
 50/60Hz

 NO FLICKER

Ra
 >80

 NO DIM


 60°

 Material

 IP20

 COB LED

Code	Power	Size	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox	Outbox Dimensions
TSL-C003/10	10W	D90xH80cm	1pc	1000lm	100lm/W	80	0.5	60/1	49x29x38cm



DOWN LIGHT Aluminum

2 YEARS
V
 85 - 265V
 50/60Hz

 NO FLICKER

Ra
 >80

 NO DIM

 100°

 Material

 IP20

 COB LED

Code	Power	Size	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox	Outbox Dimensions
TSL-D004/7	7W	95x45@75	1pc	700lm	100lm/W	80	0.5	100/1	50x34.5x48cm
TSL-D004/10	10W	110x45@100	1pc	1000lm	100lm/W	80	0.5	50/1	70.5x29.5x31cm
TSL-D004/15	15W	170x65@155	1pc	1500lm	100lm/W	80	0.5	40/1	74x39.5x38cm
TSL-D004/20	20W	195x65@170	1pc	2000lm	100lm/W	80	0.5	20/1	50x34.5x48cm
TSL-D004/30	30W	225x60@200	1pc	3000lm	100lm/W	80	0.9	20/1	49x39.5x49cm





DOWN LIGHT
COB Aluminum

2 YEARS



Code	Power	Size	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox	Outbox Dimensions
TSL-D016/7	7W	D90	1pc	700lm	100lm/W	80	0.5	100/1	53x29.5x44cm
TSL-D016/10	10W	D120	1pc	1000lm	100lm/W	80	0.5	50/1	65x39.5x29cm
TSL-D016/15	15W	D170	1pc	1500lm	100lm/W	80	0.5	20/1	36.5x29.5x38cm
TSL-D016/30	30W	D220	1pc	3000lm	100lm/W	80	0.9	20/1	58x47x26cm



DOWN LIGHT
COB Aluminum

2 YEARS



Code	Power	Size	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox	Outbox Dimensions
TSL-D013/7	7W	D95	1pc	700lm	100lm/W	80	0.5	100/1	53x50x35cm
TSL-D013/12	12W	D130	1pc	1000lm	100lm/W	80	0.5	50/1	68x31.5x40cm
TSL-D013/18	18W	D165	1pc	1800lm	100lm/W	80	0.5	30/1	50x39x36cm
TSL-D013/40	40W	D220	1pc	4000lm	100lm/W	80	0.9	20/1	60x51x48cm





RIVA LED Down Light

2 YEARS
V
130-265V
50/60Hz

NO FLICKER

Ra
>80

NO DIM



120°

Material

IP20

SMD LED

Code	Power	Size	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox	Outbox Dimensions
TSL-D011/6	6W	100x25	SMD2835 16pcs	600lm	100lm/W	80	0.5	100/1	42x23x52cm
TSL-D011/9	9W	120x25	SMD2835 22pcs	900lm	100lm/W	80	0.5	80/1	52x22.5x50cm
TSL-D011/12	12W	145x25	SMD2835 30pcs	1200lm	100lm/W	80	0.5	60/1	60x22.5x46cm
TSL-D011/18	18W	185x25	SMD2835 50pcs	1800lm	100lm/W	80	0.5	30/1	57.5x22.5x39cm
TSL-D011/24	24W	230x25	SMD2835 90pcs	2400lm	100lm/W	80	0.5	30/1	56.5x25x49cm



MOON Frameless Down Light

2 YEARS
V
85-265V
50/60Hz

NO FLICKER

Ra
>80

NO DIM

180°

Material

IP20

SMD LED

Code	Power	Size	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox	Outbox Dimensions
TSL-PFR9012	12W	93x25	SMD2835 84pcs	1200lm	100lm/W	80	0.5	100/1	64.5x38.5x23cm
TSL-PFR12318	18W	123x25	SMD2835 162pcs	1800lm	100lm/W	80	0.5	60/1	51.5x46.5x32cm
TSL-PFR17524	24W	175x25	SMD2835 216pcs	2400lm	100lm/W	80	0.5	40/1	41.5x39.5x40cm
TSL-PFR22836	36W	228x35	SMD2835 324pcs	3600lm	100lm/W	80	0.5	20/1	48.5x23x49cm

P.F.
>0.5

CLASS II

X > 100,000
TIMES

25,000
HOURS

INSTANT
100%

SMD LED

MATERIAL
Plastic
+ Aluminium

DIM
ON/OFF



MOON+ PC/2 Ways Installation

2 YEARS



Code	Power	Size	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox	Outbox Dimensions
TSL-PL003/10	10W	90x40mm	SMD2835 50pcs	1000lm	100lm/W	80	0.5	100/1	54.5x49.5x21.5cm
TSL-PL003/20	20W	120x40mm	SMD2835 99pcs	2000lm	100lm/W	80	0.5	100/1	64.5x54.5x27.5cm
TSL-PL003/30	30W	175x40mm	SMD2835 170pcs	3000lm	100lm/W	80	0.5	600/1	56x54.5x38.5cm
TSL-PL003/40	40W	225x40mm	SMD2835 266pcs	4000lm	100lm/W	80	0.5	40/1	54.5x48x48.5cm



DOWN LIGHT Free Cut Size Design

2 YEARS



Code	Power	Size	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox	Outbox Dimensions
TSL-PFR9309	9W	93x25mm	SMD2835 54pcs	900lm	100lm/W	80	0.5	100/1	59x47x22cm
TSL-PFFR12312	12W	123x25mm	SMD2835 108pcs	1200lm	100lm/W	80	0.5	60/1	47x39.5x27cm
TSL-PFFR17524	24W	175x25mm	SMD2835 144pcs	2400lm	100lm/W	80	0.5	40/1	47x37x37.5cm
TSL-PFFR22836	36W	228x25mm	SMD2835 252pcs	3600lm	100lm/W	80	0.5	40/1	48.5x25x48cm



THELUX
SHOW time


Thelux
LED TECHNOLOGY

Fixing ring

PC lens



Chip fixer

AL lamp body

Imported COB

TRACK LIGHT 1
Aluminum heat sink



2 YEARS



Code	Power	Size	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox
TSL-TL1005/12	12W	63x119mm	1pc	1080lm	90lm/W	80	0.5	20/1
TSL-TL1005/20	20W	63x150mm	1pc	1800lm	90lm/W	80	0.5	20/1
TSL-TL1005/30	30W	63x180mm	1pc	2700lm	90lm/W	80	0.5	20/1
TSL-TL1005/36	36W	73x190mm	1pc	3240lm	90lm/W	80	0.5	20/1






TRACK LIGHT 2
Aluminum heat sink

2 YEARS



Code	Power	Size	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox
TSL-TL901/12	12W	63x119	1pc	1080lm	90lm/W	80	0.5	20/1
TSL-TL901/20	20W	73x140	1pc	1800lm	90lm/W	80	0.5	20/1
TSL-TL901/30	30W	83x165	1pc	2700lm	90lm/W	80	0.5	20/1



LED PIONEER
Made in THELUX



TRACK LIGHT 3

Zooming beam

2 YEARS




Code	Power	Size	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox
TSL-TL004/12	12W	65x115	COB 1pcs	1080lm	90lm/W	80	0.5	20/1
TSL-TL004/20	20W	81x130	COB 1pcs	1800lm	90lm/W	80	0.5	20/1
TSL-TL004/30	30W	95x170	COB 1pcs	2700lm	90lm/W	80	0.5	20/1



TRACK LIGHT 4

Aluminum heat sink

2 YEARS



Code	Power	Size	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox
TSL-TL903/12	12W	63x119	1pc	1080lm	90lm/W	80	0.5	20/1
TSL-TL903/20	20W	73x145	1pc	1800lm	90lm/W	80	0.5	20/1
TSL-TL903/30	30W	83x165	1pc	2700lm	90lm/W	80	0.5	20/1





TRACK LIGHT 5
Aluminum heat sink

2 YEARS



Code	Power	Size	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox
TSL-TL816/12	12W	63x119mm	1pc	1080lm	90lm/W	80	0.5	20/1
TSL-TL816/20	20W	73x140mm	1pc	1800lm	90lm/W	80	0.5	20/1
TSL-TL816/30	30W	83x165mm	1pc	2700lm	90lm/W	80	0.5	20/1



TRACK LIGHT 6
Aluminum heat sink

2 YEARS



Code	Power	Size	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox
TSL-TL818/12	12W	63x110	1pc	1080lm	90lm/W	80	0.5	20/1
TSL-TL818/20	20W	77x120	1pc	1800lm	90lm/W	80	0.5	20/1
TSL-TL818/30	30W	88x140	1pc	2700lm	90lm/W	80	0.5	20/1



20

Bulbs

COB
Downlights

SMD
Downlights

Track Lights

Highbay Lights





TRACK LIGHT 7

Coloring beam

2 YEARS



Code	Power	Size	LEDs	Lum.Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox
TSL-TL1001C/12	12W	80x131	1pc	1080lm	90lm/W	80	0.5	20/1
TSL-TL1001C/20	20W	80x165	1pc	1800lm	90lm/W	80	0.5	20/1
TSL-TL1001C/30	30W	80x181	1pc	2700lm	90lm/W	80	0.5	20/1



TRACK LIGHT 8

Zooming beam

2 YEARS



Code	Power	Size	LEDs	Lum.Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox
TSL-TL1001Z/12	12W	80x120	1pc	1080lm	90lm/W	80	0.5	20/1
TSL-TL1001Z/20	20W	80x150	1pc	1800lm	90lm/W	80	0.5	20/1
TSL-TL1001Z/30	30W	80x170	1pc	2700lm	90lm/W	80	0.5	20/1

21



LED PIONEER

Made in THELUX



TRACK LIGHT 9 60° Reflector

2 YEARS



Code	Power	Size	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox
TSL-TL1001R/12	12W	63x119mm	1pc	1080lm	90lm/W	80	0.5	20/1
TSL-TL1001R/20	20W	73x140mm	1pc	1800lm	90lm/W	80	0.5	20/1
TSL-TL1001R/30	30W	83x165mm	1pc	2700lm	90lm/W	80	0.5	20/1



TRACK LIGHT 10 60° Lens



2 YEARS




Code	Power	Size	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox
TSL-TL1001L/12	12W	63x119mm	1pc	1080lm	90lm/W	80	0.5	20/1
TSL-TL1001L/20	20W	73x140mm	1pc	1800lm	90lm/W	80	0.5	20/1
TSL-TL1001L/30	30W	83x165mm	1pc	2700lm	90lm/W	80	0.5	20/1





TRACK LIGHT 11
 Marketing Product

2 YEARS


Code	Power	Size	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox
TSL-TL002/12	12W	65x150	1pc	1080lm	90lm/W	80	0.5	30/1
TSL-TL002C/20	20W	75x160	1pc	1800lm	90lm/W	80	0.5	30/1
TSL-TL002C/30	30W	75x170	1pc	2700lm	90lm/W	80	0.5	30/1


TRACK LIGHT 12
 Marketing Product

2 YEARS


Code	Power	Size	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox
TSL-TL802A/15	15W	62x145	1pc	1350lm	90lm/W	80	0.5	30/1
TSL-TL802A/25	25W	75x170	1pc	2250lm	90lm/W	80	0.5	30/1





TheLux 
LED TECHNOLOGY

"The Lux* is enough."

*Lux is the unit of illumination

Product Detail


HIGHBAY LIGHT
Aluminum

2 YEARS

V
85-265V
50/60Hz

NO FLICKER

Ra
>80

NO DIM

100°

Material

IP65

SMD LED

Code	Power	Size/mm	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox	Carton size
TSL-HL001/100	100W	D290xH140	100pcs	12000lm	120lm/W	80	0.9	1/1	32x32x15.5cm
TSL-HL001/150	150W	D350xH140	150pcs	18000lm	120lm/W	80	0.9	1/1	37x37x15.5cm
TSL-HL001/200	200W	D400xH140	200pcs	24000lm	120lm/W	80	0.9	1/1	41.5x41.5x15.5cm
TSL-HL001/240	240W	D400xH140	240pcs	28800lm	120lm/W	80	0.9	1/1	41.5x41.5x15.5cm


HIGHBAY LIGHT
Aluminum

2 YEARS

V
85-265V
50/60Hz

NO FLICKER

Ra
>80

NO DIM


100°

Material


IP65

SMD LED

Code	Power	Size/mm	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox	Carton size
TSL-HL004/100	100W	D237xH90	100pcs	12000lm	120lm/W	80	0.9	10/1	52x50.5x27cm
TSL-HL004/150	150W	D300xH96	150pcs	18000lm	120lm/W	80	0.9	5/1	55.5x33.5x33.5cm
TSL-HL004/200	200W	D360xH96	200pcs	24000lm	120lm/W	80	0.9	4/1	38.5x33x38.5cm




HIGHBAY LIGHT Aluminum

2 YEARS


Code	Power	Size/mm	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox
TSL-HL003/50	50W	D450xH400	1pc	5000lm	100lm/W	80	0.9	10/1
TSL-HL003/70	70W	D500xH405	1pc	7000lm	100lm/W	80	0.9	8/1
TSL-HL003/100	100W	D500xH410	1pc	10000lm	100lm/W	80	0.9	6/1
TSL-HL003/150	150W	D500xH450	3pcs	15000lm	100lm/W	80	0.9	4/1
TSL-HL003/200	200W	D500xH470	4pcs	20000lm	100lm/W	80	0.9	1/1
TSL-HL003/250	250W	D430xH420	5pcs	25000lm	100lm/W	80	0.9	1/1
TSL-HL003/300	300W	D490xH290	6pcs	30000lm	100lm/W	80	0.9	1/1



HIGHBAY LIGHT Aluminum

2 YEARS


Code	Power	Size/mm	LEDs	Lum. Flux	Lum. Efficiency	CRI	PF	Pcs/ Outbox	Carton size
TSL-HL002/100	100W	D275xH110	140pcs	12000lm	120lm/W	80	0.9	1/1	28.5x28.5x12cm
TSL-HL002/150	150W	D310xH110	210pcs	18000lm	120lm/W	80	0.9	1/1	32x32x12cm
TSL-HL002/200	200W	D345xH110	280pcs	24000lm	120lm/W	80	0.9	1/1	38.5x38.5x12.5



Families with you at home,
THELUX with you out there.





APPLICATION



SWORD Aluminum + IP Driver

3 YEARS



Code	Power	CRI	LEDs	Lum. Flux	Lum. Efficiency	Size	PF	Pcs/ Outbox	Outbox Dimensions
TSL-R005/50	50W	80	COB 1pcs	5500lm	110lm/W	495x200x60	0.9	1/1	52.5*24*9cm
TSL-R005/100	100W	80	COB 2pcs	11000lm	110lm/W	640x245x70	0.9	1/1	66*27*11cm
TSL-R005/150	150W	80	COB 3pcs	16500lm	110lm/W	890x345x100	0.9	1/1	91*33.5*11.5cm
TSL-R005/200	200W	80	COB 4pcs	22000lm	110lm/W	950x350x80	0.9	1/1	97*36*11.5cm
TSL-R005/250	250W	80	COB 5pcs	27500lm	110lm/W	1100x360x100	0.9	1/1	111.5*36*11.5cm



APPLICATION




COBRA Aluminum + IP Driver

3 YEARS



Code	Power	CRI	LEDs	Lum. Flux	Lum. Efficiency	Size	PF	Pcs/ Outbox	Outbox Dimensions
TSL-R006/50	50W	80	COB 1pcs	5500lm	110lm/W	490x215x65	0.9	1/1	500x220x95cm
TSL-R006/100	100W	80	COB 2pcs	11000lm	110lm/W	700x275x75	0.9	1/1	72.5x290x110cm
TSL-R006/150	150W	80	COB 3pcs	16500lm	110lm/W	830x310x75	0.9	1/1	855x340x110cm







APPLICATION



DOLPHIN Aluminum + IP Driver

3 YEARS





Code	Power	CRI	LEDs	Lum. Flux	Lum. Efficiency	Size	PF	Pcs/ Outbox	Outbox Dimensions
TSL-R004/50	50W	80	COB 1pcs	5500lm	110lm/W	670x240x90	0.9	1/1	70*26*11cm
TSL-R004/100	100W	80	COB 2pcs	11000lm	110lm/W	820x300x90	0.9	1/1	85x32x11cm
TSL-R004/150	150W	80	COB 3pcs	16500lm	110lm/W	980x370x100	0.9	1/1	110x39x12cm



POWER Aluminum + IP Driver

3 YEARS



Code	Power	CRI	LEDs	Lum. Flux	Lum. Efficiency	Size	PF	Pcs/ Outbox	Outbox Dimensions
TSL-R020/50	50W	80	COB 1pcs	5500lm	110lm/W	52.6x24x9	0.9	1/1	55x24.5x10cm
TSL-R020/100	100W	80	COB 2pcs	11000lm	110lm/W	71x24.8x9	0.9	1/1	73x26x10cm
TSL-R020/150	150W	80	COB 3pcs	16500lm	110lm/W	79.5x31.2x9	0.9	1/1	82x33x13cm
TSL-R020/200	200W	80	COB 4pcs	22000lm	110lm/W	96x33x13	0.9	1/1	99x34x15cm






APPLICATION



BULLET

Aluminum + IP Driver

3 YEARS



Code	Power	CRI	LEDs	Lum. Flux	Lum. Efficiency	Size	PF	Pcs/ Outbox	Outbox Dimensions
TSL-R007/50	50W	80	SMD3030 60pcs	5500lm	110lm/W	500x170x75	0.9	1/1	54x19x12.8cm
TSL-R007/100	100W	80	SMD3030 120pcs	11000lm	110lm/W	650x200x80	0.9	1/1	64x24.3x13.8cm
TSL-R007/150	150W	80	SMD3030 180pcs	16500lm	110lm/W	680x220x85	0.9	1/1	71.5x24.3x13.8cm



APPLICATION



HOPE

Aluminum + IP Driver

3 YEARS



Code	Power	CRI	LEDs	Lum. Flux	Lum. Efficiency	Size	PF	Pcs/ Outbox	Outbox Dimensions
TSL-R001/60	60W	80	SMD3030 72pcs	6600lm	110lm/W	52x21.2x9	0.9	1/1	56x24x25.5cm
TSL-R001/100	100W	80	SMD3030 96pcs	11000lm	110lm/W	63x25x17	0.9	1/1	68x29.5x15cm
TSL-R001/150	150W	80	SMD3030 180pcs	16500lm	110lm/W	70x29.5x17	0.9	1/1	75x35.5x16.5cm
TSL-R001/240	150W	80	SMD3030 240pcs	26400lm	110lm/W	85x36.6x19.8	0.9	1/1	91.5x29.5x15cm





APPLICATION




FATTO
Aluminum + IP Driver

3 YEARS



Code	Power	CRI	LEDs	Lum. Flux	Lum. Efficiency	Size	PF	Pcs/ Outbox	Outbox Dimensions
TSL-R013/40	40W	80	SMD3030 40pcs	5500lm	110lm/W	33x15x65	0.9	20/1	64x34x38cm
TSL-R013/60	60W	80	SMD3030 60pcs	6600lm	110lm/W	37.5x15x6.5	0.9	20/1	64x39x38cm
TSL-R013/96	96W	80	SMD3030 96pcs	10560lm	110lm/W	52.5x18x7.5	0.9	10/1	54.5x39x48cm
TSL-R013/150	150W	80	SMD3030 150pcs	16500lm	110lm/W	65x26x9.5	0.9	1/1	68x26x12cm
TSL-R013/200	200W	80	SMD3030 200pcs	22000lm	110lm/W	70x26x9.5	0.9	1/1	73x29x12cm



APPLICATION



KINGDOU
Aluminum + IP Driver

3 YEARS



Code	Power	CRI	LEDs	Lum. Flux	Lum. Efficiency	Size	PF	Pcs/ Outbox	Carton Size
TSL-R031/50	50W	80	SMD3030 60pcs	5500lm	110lm/W	50x21x7	0.9	1/1	51x22x10cm
TSL-R031/100	100W	80	SMD3030 128pcs	11000lm	110lm/W	52x22x7	0.9	1/1	53x23x10cm
TSL-R031/150	150W	80	SMD3030 180pcs	16500lm	110lm/W	60x25.5x7	0.9	1/1	62x28x10cm





APPLICATION





Gento Aluminum + IP Driver

3 YEARS


Code	Power	CRI	LEDs	Lum. Flux	Lum. Efficiency	Size	PF	Pcs/ Outbox	Outbox Dimensions
TSL-R008/50	50W	80	SMD3030 50pcs	5500lm	110lm/W	54x21.3x5	0.9	1/1	57x22x9cm
TSL-R008/100	100W	80	SMD3030 100pcs	11000lm	110lm/W	60x25.5x5	0.9	1/1	62x28x10cm
TSL-R008/150	150W	80	SMD3030 150pcs	16500lm	110lm/W	71.5x25.5x5	0.9	1/1	73x27.5x10cm




APPLICATION







HOPE Aluminum + IP Driver

3 YEARS


Code	Power	CRI	LEDs	Lum. Flux	Lum. Efficiency	Size	PF	Pcs/ Outbox	Outbox Dimensions
TSL-R030/50	50W	80	SMD3030 50pcs	5500lm	110lm/W	48.5x21x7	0.9	1/1	51x21.5x9cm
TSL-R032/100	100W	80	SMD3030 100pcs	11000lm	110lm/W	53.8x23.8x10.2	0.9	1/1	55.5x24.5x11.5cm
TSL-R032/150	150W	80	SMD3030 150pcs	16500lm	110lm/W	60.2x27.6x10.5	0.9	1/1	63x28.5x11.5cm
TSL-R032/200	200W	80	SMD3030 200pcs	22000lm	110lm/W	69.7x31.1x11.2	0.9	1/1	71.5x32x13cm




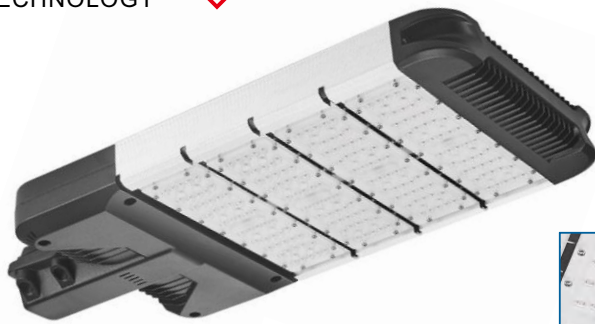


APPLICATION




TRANSFORMER1 Aluminum + IP Driver

3 YEARS



Code	Power	CRI	LEDs	Lum. Flux	Lum. Efficiency	Size	PF	Pcs/ Outbox
TSL-R030/100 100W	100W	80	SMD3030 100pcs	11000lm	110lm/W	48.5x30x9	0.9	1/1
TSL-R030/150 150W	150W	80	SMD3030 150pcs	16500lm	110lm/W	56.3x30x9	0.9	1/1
TSL-R030/200 200W	200W	80	SMD3030 200pcs	22000lm	110lm/W	64.1x30x9	0.9	1/1
TSL-R030/250 250W	250W	80	SMD3030 250pcs	27500lm	110lm/W	72x30x9	0.9	1/1
TSL-R030/300 300W	300W	80	SMD3030 300pcs	33000lm	110lm/W	79.7x30x9	0.9	1/1





APPLICATION




TRANSFORMER2 Aluminum + IP Driver

3 YEARS



Code	Power	CRI	LEDs	Lum. Flux	Lum. Efficiency	Size	PF	Pcs/ Outbox
TSL-R031/100 100W	100W	80	SMD3030 100pcs	11000lm	110lm/W	49x30x8.5	0.9	1/1
TSL-R031/150 150W	150W	80	SMD3030 150pcs	16500lm	110lm/W	56.8x30x8.5	0.9	1/1
TSL-R031/200 200W	200W	80	SMD3030 200pcs	22000lm	110lm/W	64.6x30x8.5	0.9	1/1
TSL-R031/250 250W	250W	80	SMD3030 250pcs	27500lm	110lm/W	72.4x30x8.5	0.9	1/1
TSL-R031/300 300W	300W	80	SMD3030 300pcs	33000lm	110lm/W	80x30x8.5	0.9	1/1



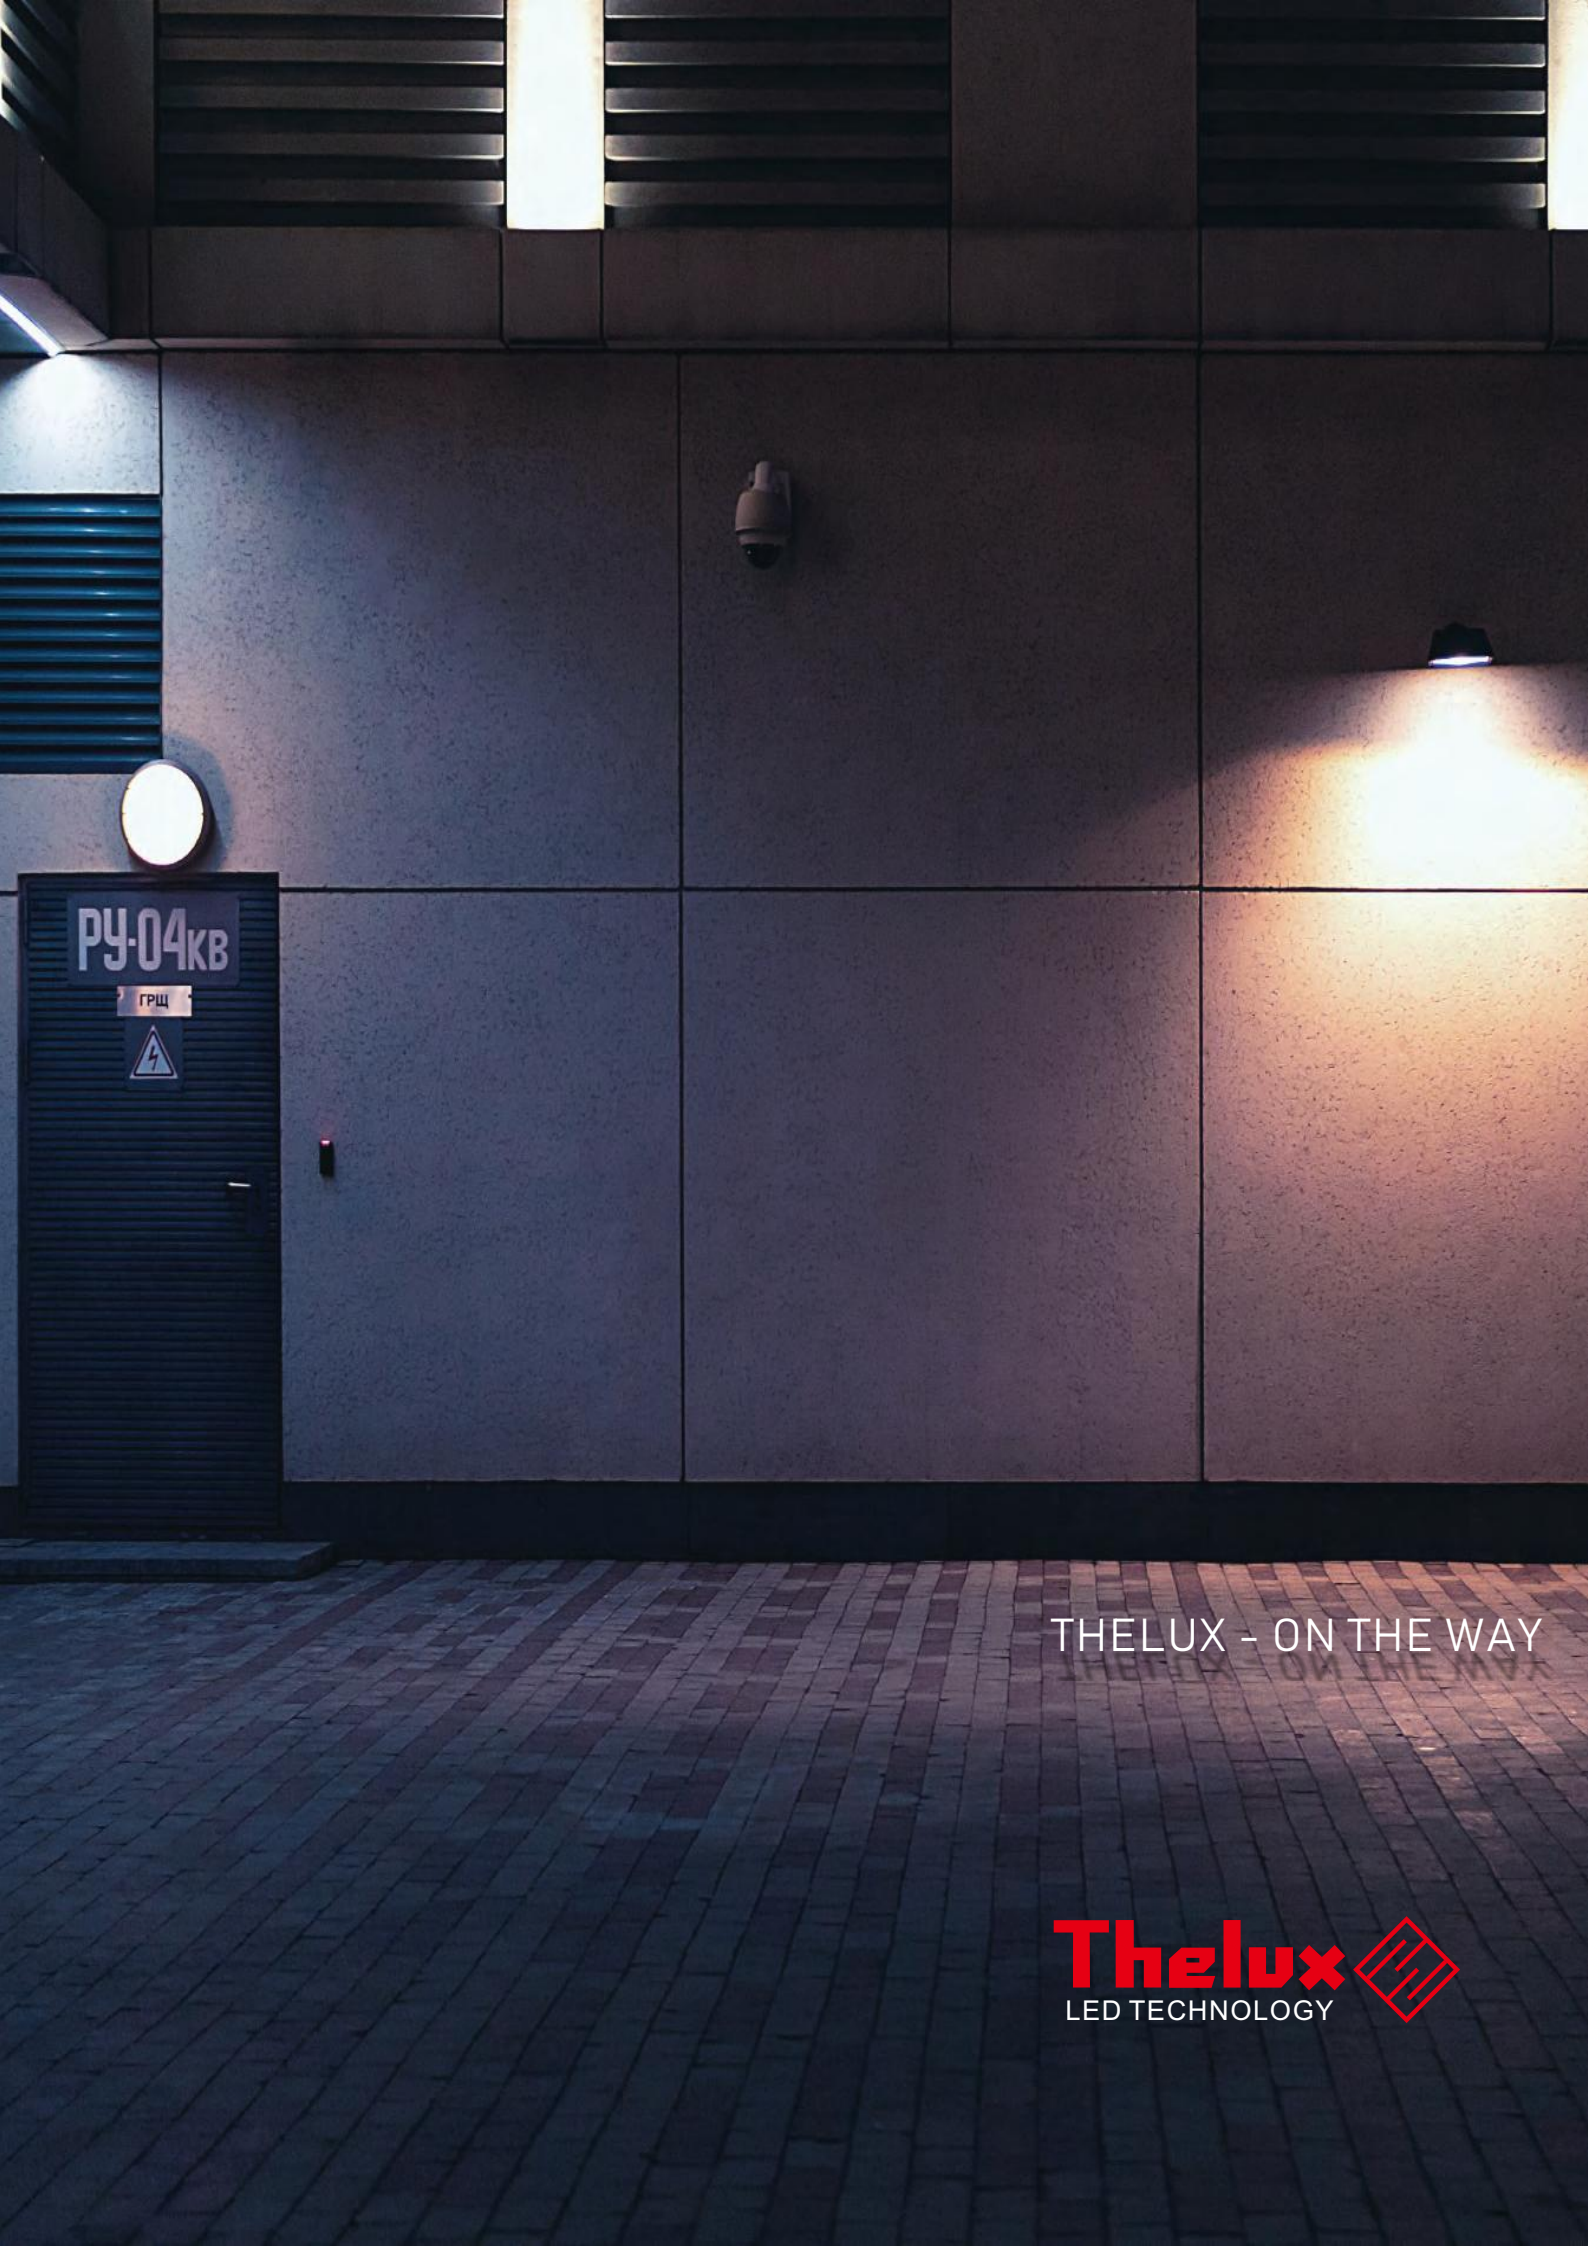

РЧ-04кВ

ГРЩ



THELUX - ON THE WAY

Thelux 
LED TECHNOLOGY



APPLICATION



STITCH
Aluminum + DOB

2 YEARS



Code	Power	CRI	LEDs	Lum. Flux	Lum. Efficiency	Size	PF	Pcs/ Outbox	Outbox Dimensions
TSL-FL020A/50	50W	80	SMD2835 54pcs	5500lm	110lm/W	218x138x25	0.9	24/1	42x25x31cm
TSL-FL020A/150	150W	80	SMD2835 162pcs	16500lm	110lm/W	435x237x25	0.9	6/1	46x26x26cm
TSL-FL020A/200	200W	80	SMD2835 216pcs	22000lm	110lm/W	445x302x25	0.9	5/1	47x22x32.5cm
TSL-FL020A/300	300W	80	SMD2835 324pcs	33000lm	110lm/W	445x440x25	0.9	1/1	46.5x46x8cm
TSL-FL020B/100	100W	80	SMD2835 108pcs	11000lm	110lm/W	290x198x25	0.9	12/1	42x31.5x22cm
TSL-FL020B/200	200W	80	SMD2835 216pcs	22000lm	110lm/W	416x310x25	0.9	6/1	44x26x33.5cm
TSL-FL020B/300	300W	80	SMD2835 324pcs	33000lm	110lm/W	614x310x25	0.9	4/1	64x18x33.5cm
TSL-FL020B/400	400W	80	SMD2835 432pcs	44000lm	110lm/W	590x420x25	0.9	1/1	61x44x8cm
TSL-FL020B/400	600W	80	SMD2835 648pcs	66000lm	110lm/W	620x590x25	0.9	1/1	64x61x8cm





Ultra Slim



APPLICATION

MOBIL DESIGN
Aluminum + DOB


2 YEARS



Code	Power	CRI	LEDs	Lum. Flux	Lum. Efficiency	Size	PF	Pcs/Outbox	Carton Size
TSL-FL005/10	10W	80	SMD2835 12pcs	1100lm	110lm/W	11.1x8.8x1.1	0.9	80/1	33x21x28
TSL-FL005/20	20W	80	SMD2835 24pcs	2200lm	110lm/W	14.5x11.1x1.2	0.9	60/1	38x33x17.5
TSL-FL005/30	30W	80	SMD2835 36pcs	3300lm	110lm/W	17.5x13.4x1.4	0.9	40/1	38x31x20
TSL-FL005/50	50W	80	SMD2835 60pcs	5500lm	110lm/W	21.1x16x1.5	0.9	24/1	46x19x24
TSL-FL005/100	100W	80	SMD2835 120pcs	11000lm	110lm/W	31x23.5x2.5	0.9	10/1	33.5x28x25.5



Excellent Quality

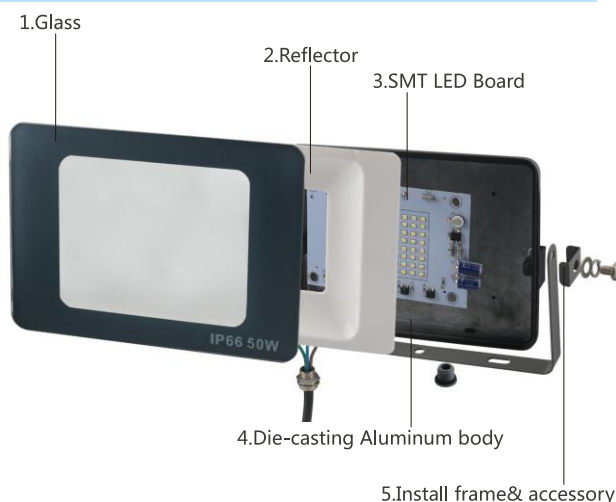


APPLICATION

HORIZON
Aluminum + Driver

2 YEARS



Code	Power	CRI	LEDs	Lum. Flux	Lum. Efficiency	Size	PF	Pcs/Outbox
TSL-FL018/30	30W	80	SMD2835 40pcs	3300lm	110lm/W	14.1x11x2.7	0.9	80/1
TSL-FL018/50	50W	80	SMD2835 66pcs	5500lm	110lm/W	20.7x14.5x2.7	0.9	60/1
TSL-FL018/100	100W	80	SMD2835 132pcs	11000lm	110lm/W	27.6x20.5x3.1	0.9	40/1
TSL-FL018/150	150W	80	SMD2835 198pcs	16500lm	110lm/W	31.5x23.5x3.5	0.9	24/1
TSL-FL018/200	200W	80	SMD2835 264pcs	22000lm	110lm/W	37.2x28.2x4.1	0.9	10/1





APPLICATION



GIANT Aluminum + IP Driver

2 YEARS



Code	Power	CRI	LEDs	Lum. Flux	Lum. Efficiency	Size	PF	Pcs/ Outbox	Outbox Dimensions
TSL-FL008/50	50W	80	SMD2835 60pcs	5500lm	110lm/W	245x205x42	0.9	20/1	70*26*11cm
TSL-FL008/100	100W	80	SMD2835 120pcs	11000lm	110lm/W	296x255x48	0.9	10/1	85x32x11cm
TSL-FL008/150	150W	80	SMD2835 180pcs	16500lm	110lm/W	345x282x52	0.9	10/1	110x39x12cm
TSL-FL008/200	200W	80	SMD2835 240pcs	22000lm	110lm/W	402x325x55	0.9	8/1	85x32x11cm
TSL-FL008/300	300W	80	SMD2835 360pcs	33000lm	110lm/W	450x350x55	0.9	5/1	110x39x12cm



APPLICATION




MASER Aluminum + IP Driver

2 YEARS



Code	Power	CRI	LEDs	Lum. Flux	Lum. Efficiency	Size	PF	Pcs/ Outbox	Outbox Dimensions
TSL-FL006/50	50W	80	SMD2835 70pcs	5500lm	110lm/W	238x228x35	0.9	15/1	78.5x28x30.5cm
TSL-FL006/100	100W	80	SMD2835 120pcs	11000lm	110lm/W	290x280x50	0.9	10/1	65x32x37.5cm
TSL-FL006/150	150W	80	SMD2835 180pcs	16500lm	110lm/W	330x320x50	0.9	5/1	38x36.5x41.5cm
TSL-FL006/200	200W	80	SMD2835 240pcs	20000lm	110lm/W	360x350x50	0.9	8/1	39.5x38x43.5cm






APPLICATION




ZARA
Aluminum + IP Driver

2 YEARS



Code	Power	CRI	LEDs	Lum. Flux	Lum. Efficiency	Size	PF	Pcs/Outbox
TSL-FL021/50	50W	80	SMD2835 50pcs	5500lm	110lm/W	23x18.3x6.5	0.9	1/1
TSL-FL021/100	100W	80	SMD2835 100pcs	11000lm	110lm/W	27x21.5x6.5	0.9	1/1
TSL-FL021/200	200W	80	SMD2835 200pcs	22000lm	110lm/W	35.8x29.3x6.5	0.9	1/1
TSL-FL021/300	300W	80	SMD2835 300pcs	33000lm	110lm/W	42x32.5x6.8	0.9	1/1
TSL-FL021/400	400W	80	SMD2835 400pcs	44000lm	110lm/W	53x33.8x6.8	0.9	1/1
TSL-FL021/500	500W	80	SMD2835 500pcs	55000lm	110lm/W	64.5x35.5x7.8	0.9	1/1
TSL-FL021/600	600W	80	SMD2835 600pcs	66000lm	110lm/W	64.5x35.5x7.8	0.9	1/1




APPLICATION




MIRROW
Aluminum + Driver

2 YEARS



Code	Power	CRI	LEDs	Lum. Flux	Lum. Efficiency	Size	PF	Pcs/Outbox	Carton Size
TSL-FL022/50	50W	80	SMD2835 72pcs	5500lm	110lm/W	20.7x14.5x2.7	0.9	50/1	57x30x13.5cm
TSL-FL022/100	100W	80	SMD2835 144pcs	11000lm	110lm/W	27.6x20.5x3.1	0.9	20/1	35x32x17cm
TSL-FL022/150	150W	80	SMD2835 288pcs	16500lm	110lm/W	31.5x23.5x3.5	0.9	20/1	44x38x18.5cm
TSL-FL022/200	200W	80	SMD2835 360pcs	22000lm	110lm/W	37.2x28.2x4.1	0.9	10/1	39x29x25cm

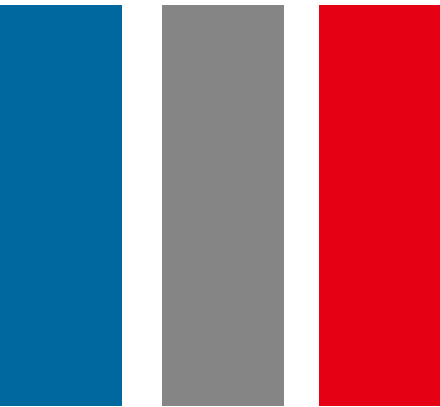

LED PIONEER



Made in THELUX

Foshan Thelux LED Lighting Co., Ltd.



Add:

9th floor Donglian Building, Xingtan Town, Shunde District
Foshan City, Guangdong, China.



Email: marvin@theluxlighting.com
elaine@theluxlighting.com

Web: <http://www.theluxchina.com>
<http://www.theluxlighting.com>

Tel: 0086-757-2768 2468

Fax: 0086-757-2768 2468